


## FITTING INSTUCTION FA109 CONDENSER FAN MOTOR

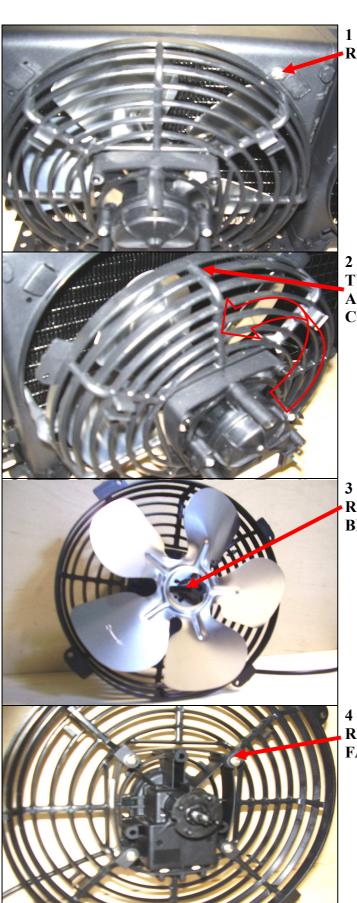

REMOVE SCREW.

TURN THE FAN GRILL ANTI-CLOCKWISE AND REMOVE FROM THE CONDENSER COWL.

REMOVE THE PLASTIC NUT AND FAN BLADE.

REMOVE 4 SCREWS AND REMOVE THE FAULTY MOTOR.



- FA109 KIT 1 Fan motor
- 1 Fitting instruction
- 4 M4 nuts

TOOLS REQUIRED
Pozidrive tip screw driver M4 nut spinner