




CLASSIC HYDRO 750 NL DISHWASHER

OPERATOR INSTRUCTIONS

WO/10-2000

SWITCH ON (ROCK RED SWITCH DOWNWARDS)

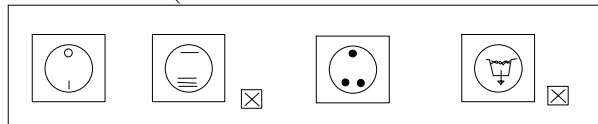

ON / OFF
SWITCH

MODE
SWITCH

READY
LIGHT

DOMINO
SWITCH

DRAIN
SWITCH

WAIT FOR MACHINE TO FILL AND HEAT UP (approx. 1/2hr)

SELECT 2 OR 4 MINUTE CYCLE

One dot = 2 Minute

Two dot = 4 Minute



WHEN **READY LIGHT** COMES ON –

TURN THE **MODE SWITCH** ON(ROCK DOWNWARDS)

OPEN THE DOOR, PUT BASKET INTO MACHINE, CLOSE DOOR

THE SWITCH WILL LIGHT UP AND START TO WASH

WHEN THE CYCLE HAS COMPLETED THE LIGHT IN THE **MODE SWITCH** WILL GO OUT
OPEN THE DOOR & REMOVE THE BASKET.

PUT ANOTHER FULL BASKET INTO THE MACHINE AND CLOSE THE DOOR

WHEN THE READY LIGHT COMES ON THE MACHINE WILL AUTOMATICLY START.

Note: THE 4 MINUTE CYCLE WILL START BEFORE THE READY LIGHT COMES ON.

STANDBY MODE

DURING IN A SLACK PERIOD YOU MAY WAIT TO FILL UP A BASKET IN THE MACHINE WITH A FEW GLASSES AT A TIME.

ROCK THE **MODE SWITCH** TO THE **UP** POSITION, THEN YOU CAN OPEN AND CLOSE THE DOOR WITHOUT THE MACHINE STARTING – WHEN THE BASKET IS FULL, ROCK THE **MODE SWITCH** DOWN AND THE MACHINE WILL START.

END OF SESSION

- 1 ROCK THE **ON/OFF SWITCH** UP TO THE OFF POSITION
- 2 ROCK THE DRAIN SWITCH AND HOLD DOWN FOR 3 SECONDS THEN RELEASE
THE DRAIN TIMER WILL DRAIN OFF THE MACHINE IN 3 MINUTES – THE LIGHT AT THE SIDE OF THE SWITCH WILL GO OUT WHEN THE CYCLE IS COMPLETE



CLEANING OUT

- 3 REMOVE LOWER WASH ARM ASSEMBLY & SAUCER WASHER
- 4 REMOVE WASH TANK FILTERS AND SUPPORT FRAME WORK.
- 5 REMOVE MOTOR FILTER FROM BOTTOM OF WASH TANK.
- 6 CLEAN ALL PARTS AND REPLACE IN REVERSE ORDER –
- 7 ? REMEMBER **THE SAUCER WASHER FITS LIP UP.**

