


Service Replacement Parts

812 Series Slice Thickness Plate Blade Guard and Cover


(Parts for Classic, Variomatic & Automatic)

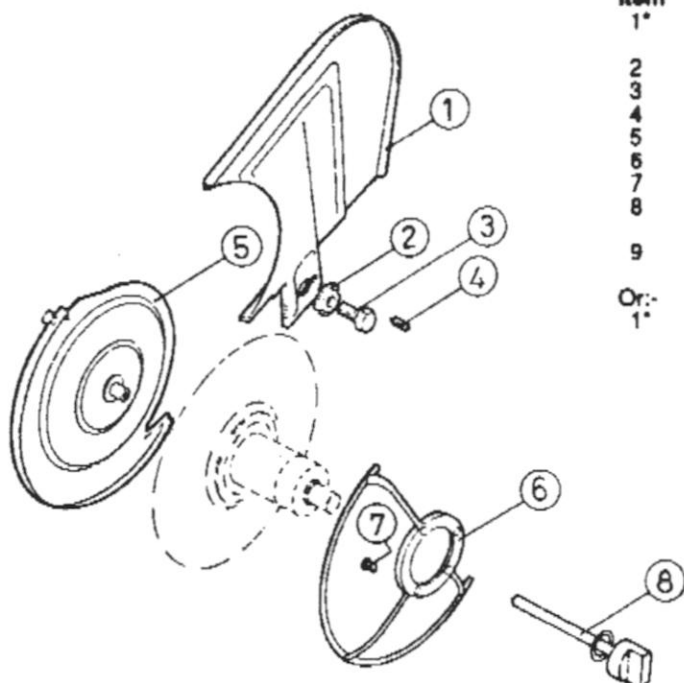

Item	Part No	Description	Qty
1*	A3434	Slice Thickness Plate Assembly (All Stainless Steel)	1
2	P0528	Washer	1
3	S0786	M12 x 20 St. Hex Head Screw	1
4	S0876	Screw M8 x 8 Socket Set	2
5	A3428	Blade Cover Assembly	1
6	P3426	Blade Guard	1
7	S0769	Screw M4 x 10 C.Sunk	3
8	A3439	Knob and Stem Assembly	1
	P8517	Washer	1
	P8233	Shim	A/R
Or:			
1*	A8693	Slice Thickness Plate Assembly (With cast support)	1
	P3414	Slice Thickness Plate	1
	P8682	Thickness Plate Support	1
	S1002	Screw M5 x 8 C'sk	6
	S1024	Blanking Label	6

812 Series Blade Carrier


(Parts for Classic, Variomatic & Automatic)

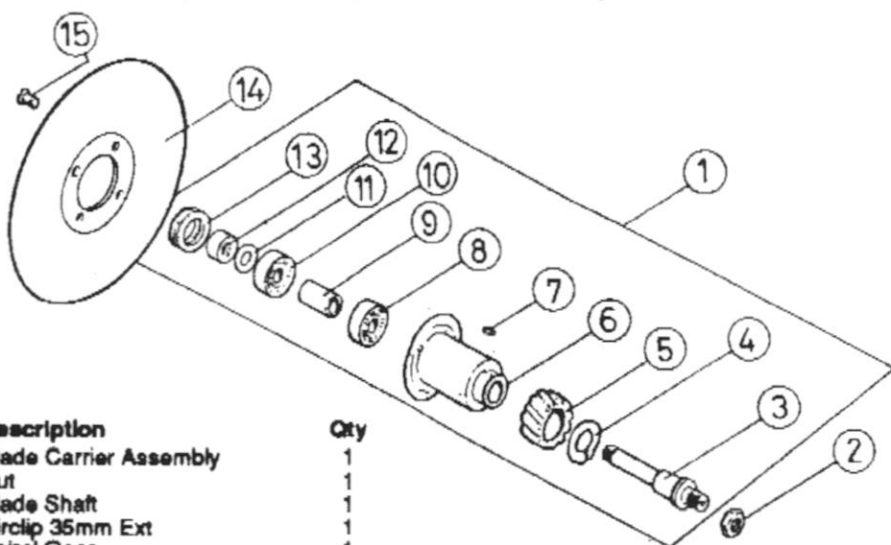

Item	Part No	Description	Qty
1	A8524	Blade Carrier Assembly	1
2	P0534	Nut	1
3	P0696	Blade Shaft	1
4	S0010	Circlip 35mm Ext	1
5	P0624	Spiral Gear	1
6	P3021	Blade Carrier Housing	1
7	S0013	Key 1/8" x 5/8"	1
8	S0018	Ball Bearing SKF.8204	1
		Grease 'Duckhams' L3	A.R.
9	P1037	Inner Distance Tube	1
10	S0585	Taper Bearing SKF.30204	1
11	P0620	SHIM .002	A.R.
	P0838	SHIM .010	A.R.
	P0839	SHIM .015	A.R.
	P0842	SHIM .030	A.R.
12	P0623	Sealing Nut	1
13	A0832	Oil Ring and Housing Assy	1
	S0956	Oil Seal	1
	P0622	Oil Ring Housing	1
14	P3007	Blade	1
15	S0204	Screw 2 BA x 3/8 C.Sunk	4


Service Replacement Parts

812 Series 220V/240V Wiring

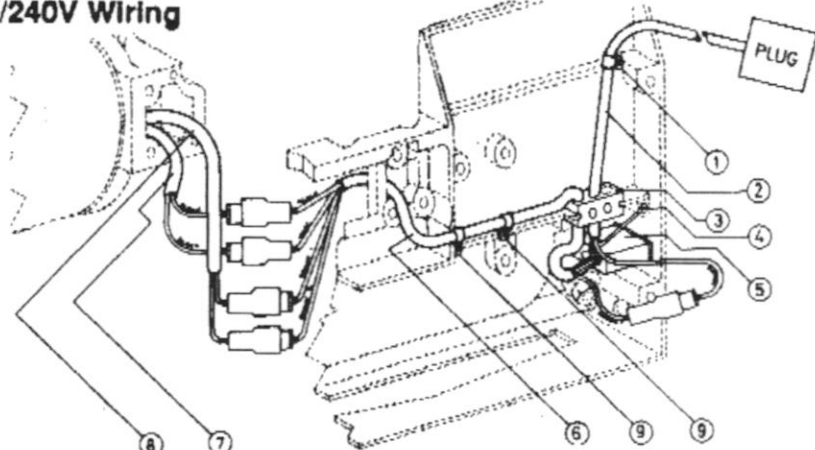

Item	Part No	Description	Qty
1	S0902	Cable Clamp 'P'	1
	S0609	Screw No 6 x 3/8"	1
Or	S0751	Screw M8 x 8 Pan Hd	1
2	Supply Lead see below		
3	P3430	Multi Cable Clip	2
	S0934	Screw No 6 x 3/4	2
Or	S1043	M4 x 20 Pan Hd	2
4	S0609	Screw No 6 x 3/8	1
	S0781	Screw M8 x 8 Pan Hd	1
	S0553	Washer 4BA Shakeproof	1


Item	Part No	Description	Qty
5	S0895	Switch Cover	1
6	A8694	Cable Assy for N.V.R	1
7	-	Cable From Motor	1
8	A8512	Microswitch Assy	1
9	S0466	Cable Clamp 'P'	2
	S0609	Screw No 6 x 3/8	2
Or	S0751	Screw M4 x 8 Pan Hd	2

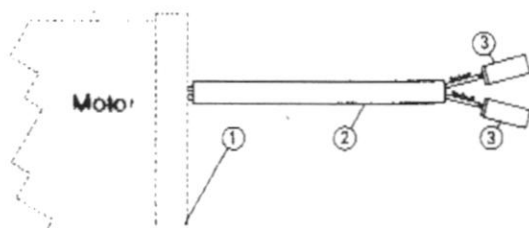

Cut existing motor cable, add duratube, thermofit sleeve, receptacles and housing.


Motor Cable Assembly Comprising:-

Item	Part No	Description	Qty
2	S0269	Duratube - 13cm -	1
3	S0746	Receptacle	2
3	S0747	Receptacle Housing	2
3	S0513	Thermofit Sleeve - 15mm -	2

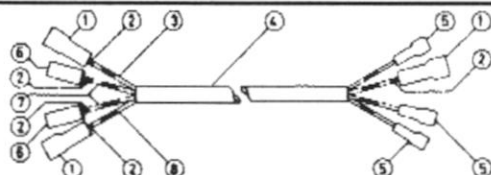


Cable Assembly - for no Volt Release

Item	Part No	Description	Qty
1	A8694	Comprising of:-	
1	S0748	Tab	3
1	S0749	Tab Housing	3
2	S0513	Thermofit Sleeve - 15mm -	5
3	S0506	White PVC Wire - 60cm -	1
4	S0269	Duratube - 50cm -	1
5	S0522	Ampliversal Wiring Terminal	3
5	S0523	Imp. Industrial Insulating Boot	3
6	S0746	Receptacle	2
6	S0747	Receptacle Housing	2
7	S0644	Brown PVC Wire - 60cm -	1
8	S0504	Black PVC Wire - 60 cm -	1

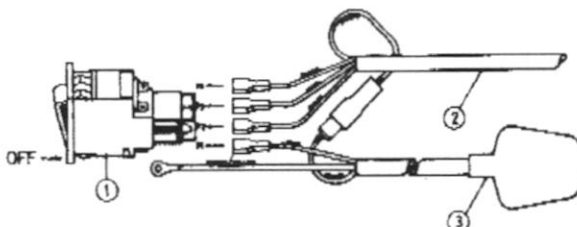

Supply Lead

Item	Part No	Description	Qty
1	S0882	No Volt Release Switch	1
	S0894	On/Off Switch	1
2	A8694	220/240v Cable Assy for N.V.R	1
3	P8680	3 Pin U.K. Plug & Cable	1
Or	P8679	2 Pin European Plug & Cable	1
	A0766	2m Long Cable only	1

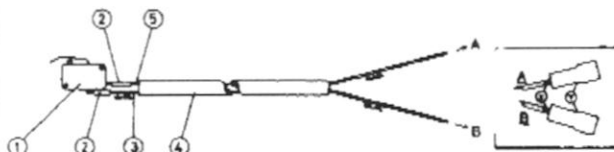

Microswitch and Lead

Item	Part No	Description	Qty
1	A8512	Microswitch Assembly comprising:	
1	S0535	Microswitch 'Omron' V15 FL-3A	1
2	S0513	Thermofit Sleeve - 15 mm -	2
3	S0506	White PVC Wire - 60 cm -	1
4	S0269	Duratube - 50 cm -	1
5	S0504	Black PVC Wire - 60 cm -	1
6	S0513	Thermofit Sleeve - 15 mm -	2
7	S0748	Tab	2
8	S0749	Tab Housing	2

Because of continual improvements strict accuracy of description and illustrations cannot be guaranteed